


Power Supply & Others

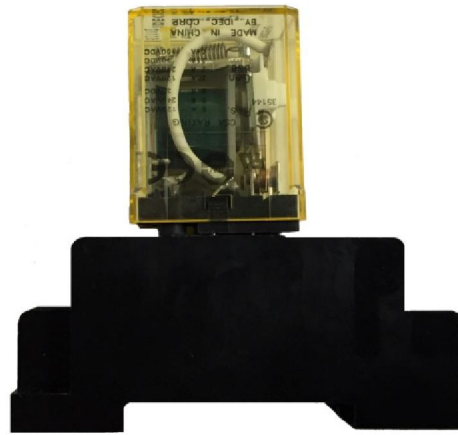

SM2S-05D & RM2S-U

RM2S-U-12V / RM2S-U-24V

- ✓ Contact Material: Silver
- ✓ Contact Resistance: 30mΩ maximum
- ✓ Operating Temperature: -25 to +45°C (no freezing)

SM2S-05D

- ✓ Slim
- ✓ Color: Black
- ✓ Terminal Screw Applicable Wire: M3, 1.25 mm²
- ✓ Rated Insulation Voltage: 250V
- ✓ Rated Current: 10A

Ascendo Pte Ltd

85 Playfair Road, #06-02 Tong Yuan Industrial Building, Singapore 368000

Tel: 6741 1218 Fax: 6741 8991

Email: sales@ascendo.com.sg