


Guard Tour – Basic System Overview



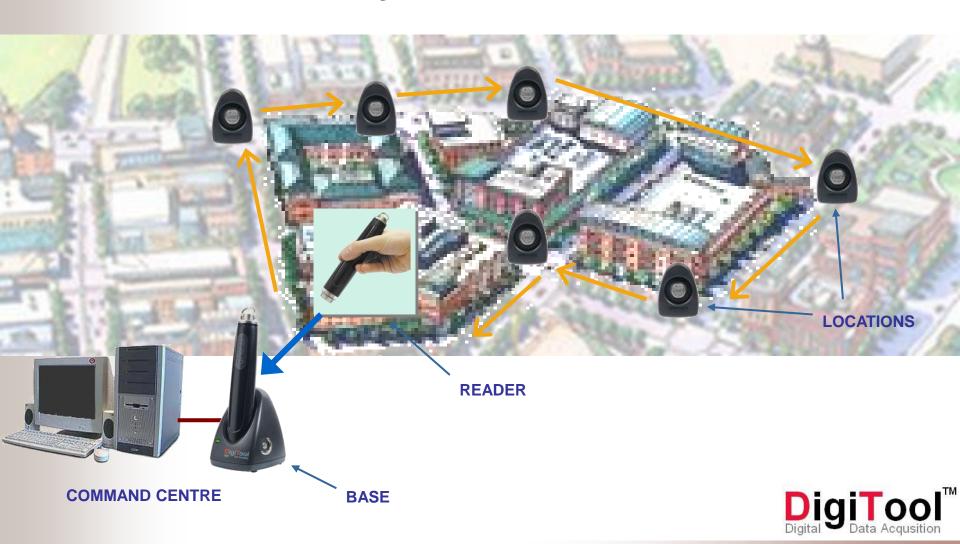

GC-01 Data Acquisition Reader

- Rugged and waterproof
- Internal Lithium-Ion 1800mAh rechargeable battery for 6 month use or 300,000 readings
- 8000 time-stamped readings storage capacity
- 360 degrees visual reading indication
- Buzzer & vibrator reading indications







GC-02 Data Acquisition Base

- Reader docking station for reader data discharge to PC and reader battery charger
- RS-232 port for PC connection @ 9600 baud, full duplex
- Rotating communications & power ports for desktop or wall mount installation
- Local iButton reader for enrolling location, events and user tags to PC
- 12VDC, max 500mA power adaptor
- 3-color LED and buzzer indications
- Water & dust resistant design
- Also available GS-03 charger only base





RS-232 PLUG

POWER PLUG



GA-01 Location Tag

- Rugged and waterproof
- Low weight (10 grams)
- 16 byte ID with open or custom facility code
- Randomly coded with 12 Hex digits (over 300 billion ID options)
- 2-screw wall mounting base, and latching cover make the tag irremovable once installed
- Available in different colors: black, red, yellow, purple and orange





GA-02 Event Wallet

- Portable wallet for special event reporting during tour
- 10 event iButtons
- Rugged design

GA-12 Numeric Event Wallet

- Numeric wallet for special event reporting during tour
- iButtons for digits 0 9, with START and END buttons to input any numeric sequence







GS-01: DigiTool Light Software





GS-01: DigiTool Light Software

- Master and regular user access levels
- Programmable features: users, sites, readers and scheduled tours
- Integrated database
- Various reporting options tours, events, exceptions and others
- Full reader upload/download and configuration

